Required Tools:

- (2) 9/16" Open-End wrench
- Level
- Tape measure
- All thread rod
- Adjustment Nut

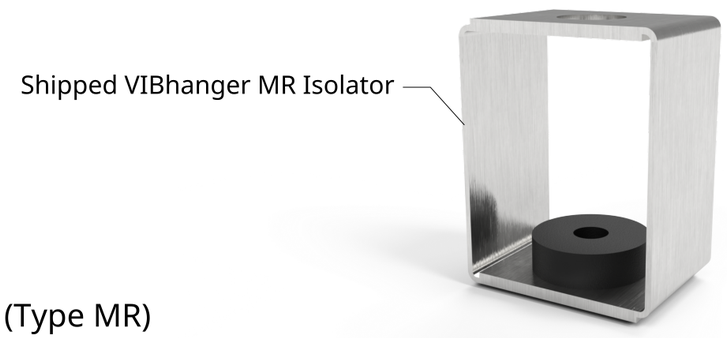

Supplied Parts:

- VIBhanger assembly with elasomeric insert (Type MR)

Installation Steps:

1. Read the entire installation instructions before installing the VIBhanger MR.
2. If drawings have been provided showing VIBhanger MR location, locate each VIBhanger at the position shown.
3. Attach the VIBhanger MR to the structure via the upper, customer-supplied all thread rod and nut assembly (A).
4. Attach the equipment to customer supplied all thread rod and nut assembly (B). If installing the VIBhanger MR to support pipe or ductwork, install the pipe ductwork using solid, all thread rod. After installing the complete system, remove the solid, all thread rod and replace with the VIBhanger MR. This is done by removing 1-2” of length from the all thread rod.
5. To level the equipment, turn the adjustment nut (C) to the right to raise the equipment, or left to lower it.
6. Once Step 6 is complete, the VIBhanger MR has been properly installed.

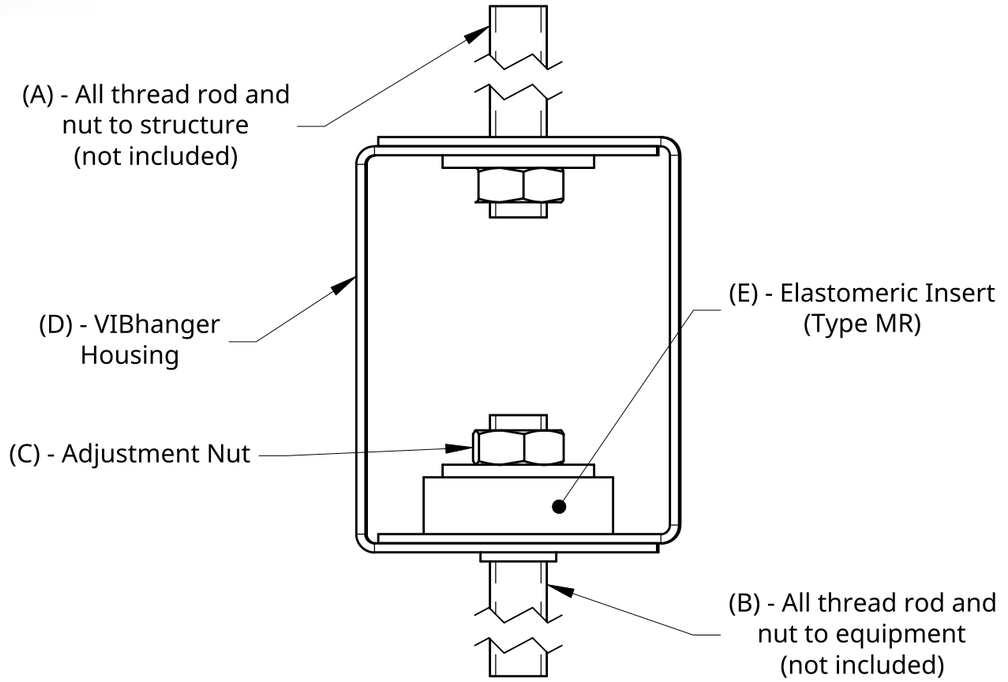

NOTES:
1. DRAWING NOT TO SCALE.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES .XX = ±.0- .XXX = ±.00- .XXXX = ±.000- ANGULAR = ± ° FRACTIONAL = ± SURFACE FINISH		NAME	DATE
	DRAWN	C.Tupa	04/30/2026
	CHECKED		
	APPROVED		
DO NOT SCALE DRAWING			
BREAK ALL SHARP EDGES AND REMOVE BURRS			
THIRD ANGLE PROJECTION	MATERIAL	FINISH	

TITLE: VIBhanger MR Installation Instructions

VIBHSO

SIZE B | DWG NO. VIBhanger MR | REV.

SCALE 1:1 | WEIGHT | SHEET 1 of 1